



RESIDENTIAL & LIGHT COMMERCIAL PRODUCT PORTFOLIO

RESIDENTIAL PRODUCT PORTFOLIO

Split



INDOOR UNITS

PAIR & MUTLI APPLICATION

Type	Model	Product name		20	25	28	35	42	50	60	71
Ururu multi	Ururu multi	CTXU-G ¹			■		■	■	■		
	Ururu Sarara	FTXR-E				■		■	■		
Wall mounted	Daikin Emura	FTXG-J			■		■		■		
	Optimized heating solution	FTXL-G		■	■		■				
	Wall mounted unit	FTXS-J/G		■	■		■	■	■	■	■
	Wall mounted unit	FTX-JV/GV ²		■	■		■		■	■	■
Ceiling mounted cassette	Slim concealed ceiling unit	FDXS-E/C			■		■		■	■	
Floor standing	Nexura - floor standing unit with radiant heat panel	FVXG-K			■		■		■		
	Floor standing unit	FVXS-F			■		■		■		
Flexi type	Flexi type unit	FLXS-B ³			■		■		■	■	

- 1) These indoor units can only be connected to multi outdoor units, pair application is not possible
- 2) 50,60,71 capacity classes cannot be connected to multi outdoor units
- 3) 60 capacity class is only connectable to multi outdoor units, pair application is not possible

OUTDOOR UNITS

PAIR & MUTLI APPLICATION


Type	Model	Product name		20	25	28	35	40	42	50	52	60	68	71	80	90	100	125	140		
AIR COOLED	HEAT PUMP	RXR-E pair application				■			■	■											
		RXG-K pair application			■		■			■	■										
		RXL-G pair application		■	■		■			■	■		■		■						
		RXS-J/F pair application		■	■		■			■	■		■		■						
		RX-JV/GV pair application		■	■		■			■	■		■		■						
AIR COOLED	HEAT PUMP	MXU-G Ururu multi						■		■											
		MXS-E ¹ multi model application										■				■	■				
		MXS-H multi model application							■		■										
		MXS-G multi model application													■						
		MXS-F ¹ multi model application													■						
		RXYSQ-P8V1 VRV ^{III} -S heat pump for residential application																		■	■

1) Following combinations are not allowed when FVXG-K indoor units are connected to multi model outdoor units:
 4MXS68F2V1B: 25+25+25+35
 5MXS90E2V3B: 20+25+25+35+50, 20+25+35+35+35, 25+25+35+35+35

LIGHT COMMERCIAL PRODUCT PORTFOLIO



INDOOR UNITS PAIR, TWIN, TRIPLE & DOUBLE TWIN APPLICATION

Type	Model	Product name		25	35	50	60	71	100	125	140	200	250	Capacity (class)	
CMSQ MULTI SYSTEM	Roundflow ceiling mounted cassette	FMCQ-A8 ¹				[Red bar from 50 to 125]									
	Inverter driven concealed ceiling unit	FMDQ-B ¹				[Red bar from 50 to 125]									
CEILING MOUNTED CASSETTE	Roundflow ceiling mounted cassette	FCQG-E						[Red bar from 71 to 140]							
	High COP, Roundflow ceiling mounted cassette ⁴	FCQH-D8 ²						[Red bar from 71 to 140]							
	Roundflow ceiling mounted cassette ⁴	FCQ-C8 ²				[Red bar from 35 to 140]									
	4-way blow ceiling mounted cassette	FFQ-BV			[Red bar from 25 to 60]										
CONCEALED CEILING	Inverter driven concealed ceiling unit	FBQ-C ²			[Red bar from 35 to 140]										
	Large concealed ceiling unit	FDQ-B ²								[Red bar from 125 to 140]		[Red bar from 200 to 250]			
WALL MOUNTED	Wall mounted unit	FAQ-B						[Red bar from 71 to 100]							
CEILING SUSPENDED	Ceiling suspended unit	FHQG-C						[Red bar from 71 to 140]							
	Ceiling suspended unit	FHQ-B			[Red bar from 35 to 125]										
	4-way blow ceiling suspended unit	FUQ-B						[Red bar from 71 to 125]							
FLOOR STANDING	Floor standing unit	FVQ-B ³						[Red bar from 71 to 125]							

1) Only use these indoor units in combination with Daikin's CMSQ Multi System - 2) Twin, triple, double twin application is only possible up to 125 class - 3) Only pair combination with RZQS



LIGHT COMMERCIAL PRODUCT PORTFOLIO



OUTDOOR UNITS

PAIR, TWIN, TRIPLE & DOUBLE TWIN APPLICATION

System	Type	Product name		71	100	125	140	200	250	
AIR COOLED	HEAT PUMP	RZQG-L		[Red bar]						
		RZQ-D3V1/D9V1 Seasonal Inverter		[Red bar]						
		RZQ-B9W1 Seasonal Inverter			[Red bar]					
		RZQS-DV1 Comfort Inverter		[Red bar]						
		RZQ-CY1 Super Inverter						[Red bar]		
		CMSQ-A Multi sytem						[Red bar]		

FOR CONNECTION WITH AIR HANDLING UNITS AND BIDDLE AIR CURTAIN


System	Type	Product name		71	100	125	140	200	250
AIR COOLED	HEAT PUMP	ERQ-AV1 ¹ Condensing Units			[Red bar]				
		ERQ-AW1 ¹ Condensing Units						[Red bar]	

1) Only use the condensing units in combinations with an air handling unit.

Type	Product name		0	200	600	800	1,000	1,500	2,000	4,000	6,000	8,000
ERQ AIR HANDLING APPLICATIONS	EKEXV-kit							[Red bar]				

Type	Product name	
BIDDLE STANDARD AIR CURTAIN (CA) FREE HANGING	CYQS150DK80 *BN/*SN	
BIDDLE STANDARD AIR CURTAIN (CA) CASSETTE	CYQS200DK100 *BN/*SN	
BIDDLE STANDARD AIR CURTAIN (CA) RECESSED	CYQS250DK140 *BN/*SN	

BIDDLE STANDARD AIR CURTAIN RANGE

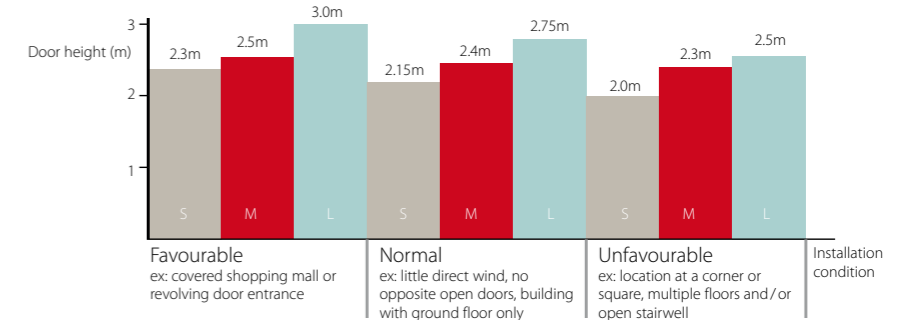

ROOFTOPS

System	Type	Product name	Refrigerant		180	240	280	320	450	560	700	850	1000	1200	
AIR COOLED	COOLING ONLY	UATP-AY1 Rooftop Unit	R-407C		[Red bar]										
	HEAT PUMP	UATYP-AY1 Rooftop Unit	R-407C									[Red bar]			
AIR COOLED	HEAT PUMP	UATYQ-CY1 Rooftop unit	R-410A		[Red bar]										

DAIKIN EUROPE N.V.

Naamloze Vennootschap
Zandvoordestraat 300
B-8400 Oostende, Belgium
www.daikin.eu
BE 0412 120 336
RPR Oostende



FSC-label plaatsen

Barcode plaatsen
ECPEN11-121



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory.